



ISO 9001/AS9100 Certified

LLC62X

**LONG STROKE LVDT DISPLACEMENT TRANSDUCER,
DC/DC WITH ISOLATED OUTPUT, CAPTIVE GUIDE ARMATURE**

YOUR ENGINEERED SOLUTION SOURCE SM



DESCRIPTION

The Series LLC62X is a high performance long stroke DC powered LVDT displacement transducer with a captive guided armature.

It is identical to the LLC61X but operates from either +5Vdc regulated or +6 to 18Vdc unregulated supply and generates an output signal of ± 2 Vdc that is isolated from the input voltage. The armature is captured in the LVDT housing and is guided by a low-friction bearing assembly.

These LVDT's have a total stroke range of 1 to 37 inches. The Series LLC62X displacement transducers can be used for both static and dynamic applications. These displacement transducers are ruggedly constructed of all stainless steel. All Series LLC62X displacement transducers are shipped with traceable calibration certificates.

PERFORMANCE

STROKE RANGES

± 0.5 inches to ± 18.5 inches

LINEARITY

$\pm 0.5\%$ of full stroke max

$\pm 0.25\%$ or ± 0.1 options on some ranges

OUTPUT

± 2.2 Vdc Nominal (Isolated from Input Voltage)

STANDARD FEATURES


- Stroke ranges from ± 0.5 inches to ± 18.5 inches
- Captive Armature
- Low Friction Bearing Assembly
- DC/DC with Isolated Voltage Output ± 2.2 Vdc
- $\pm 0.5\%$ Linearity
- Encapsulated Integral Electronics
- All Stainless Steel Construction
- Traceable Calibration Certificate

OPTIONAL FEATURES

- Improved Linearity
- Self Aligning Rod-End Bearing
- Sealing Against Moisture Ingress
- Mounting Blocks



A US Manufacturer of: Pressure, Temperature, Load/
Force/Torque, and Displacement Sensors.

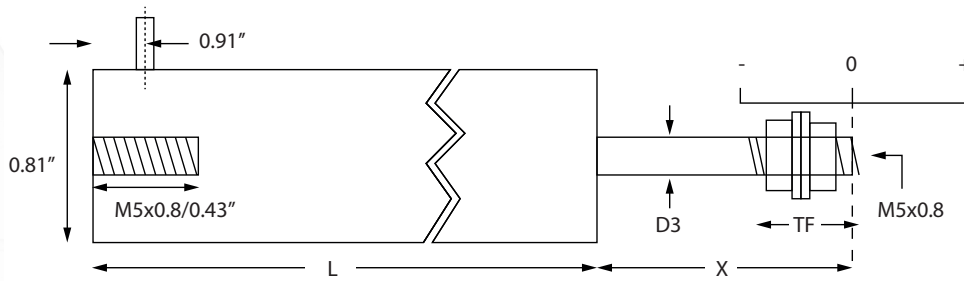

RANGE	LINEARITY ERROR (% F.S.)	L	X	D3	TOTAL WEIGHT	TF	INWARD OVER-TRAVEL	OUTWARD OVER-TRAVEL
±0.5"	<± 0.5	7.6"	1.5"	0.187"	12oz	0.6"	0.39"	0.47"
±1"	<± 0.5	8.7"	2.5"	0.187"	14oz	0.6"	0.51"	0.39"
±2"	<± 0.5	13.2"	3.0"	0.187"	1.1lb	0.6"	0.39"	0.55"
±3"	<± 0.5	17.6"	4.5"	0.187"	1.4lb	0.6"	0.94"	0.59"
±4"	<± 0.5	19.4"	5.0"	0.187"	1.7lb	0.6"	0.31"	0.55"
±6"	<± 0.5	26.9"	7.0"	0.187"	2.3lb	0.6"	0.47"	0.67"
±8"	<± 0.5	34.4"	10.0"	0.187"	3.2lb	1.3"	0.87"	0.98"
±10"	<± 0.5	42.0"	12.0"	0.187"	3.7lb	1.1"	1.34"	1.38"
±15"	<± 0.5	58.0"	16.0"	0.187"	4.9lb	0.8"	0.51"	0.51"
±18.5"	<± 0.5	68.5"	20.0"	0.236"	5.8lb	1.1"	0.20"	1.30"

MECHANICAL CHARACTERISTICS

CASE MATERIAL

Stainless steel.

ARMATURE TYPE

Captive Guided.

PROBE THREAD

M5 x 0.8.

ELECTRICAL CHARACTERISTICS

EXCITATION / SUPPLY

5 Vdc ±10% regulated.

6 to 18 Vdc unregulated, 100 mA (typical).

OUTPUT LOAD (MINIMUM)

2K Ohms.

OUTPUT RIPPLE

30mV peak to peak.

OUTPUT BANDWIDTH

200 Hz (flat).

OUTPUT IMPEDANCE

2 Ohms.

ELECTRICAL TERMINATION

Polyurethane Shield Cable (6 ft.).

Longer cable lengths (available option).

Radial Exit.

ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE RANGE

-60°F to +160°F.

TEMPERATURE EFFECT ON ZERO

±0.006% F.S./°F (typical).

TEMPERATURE EFFECT ON SPAN

±0.017% F.S./°F (typical).

MODEL IDENTIFICATION

L L C 6 2 X


Series

ELECTRICAL TERMINATIONS

Please specify termination required:

- 1 Axial Cable Exit (Optional)
- 2 Radial Cable Exit (Standard)
- 3 Axial Connector (Optional)
- 4 Radial Connector (Optional)

CONNECTION DETAILS

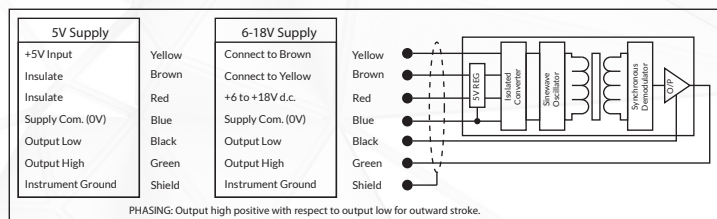

MODIFICATIONS AND WARRANTY

MODIFICATIONS: We realize transducer applications vary greatly and as such our designs are flexible. Choice of pressure port, electrical termination, material compatibility and performance characteristics are a few of the many options available. Specifications on this datasheet represent the standard configuration only. Product and company names listed are trademarks of their respective companies. Specifications subject to change without notice. WARRANTY: Stellar Technology warrants that its product shall be free from defective workmanship and/or material for a twelve month period from the date of shipment, provided that Stellar Technology's obligation hereunder shall be limited to correcting any defective material FOB our factory. No allowance will be made for any expenses incurred for correcting any defective workmanship and/or material without written consent by Stellar Technology. This warranty is in lieu of all other warranties expressed or implied.



ISO 9001/AS9100
237 Commerce Drive • Amherst, NY 14228 • USA
Tel: 716.250.1900 • Fax: 716.250.1909
Web: stellartech.com • Email: info@stellartech.com

Due to the nature of technology, changes are inevitable.
For latest technical specifications, see our website.

